



TRANSMISSION OIL

# TM-5 80W-90



## Description


TM-5 80W-90 –universal top-quality transmission oil for trucks and passenger cars (included new models). Used for lubricating of cylindrical, bevel, helical-bevel and hypoid transmissions, in which contact tensions arrive to 3000 MPa and temperature of oil to 150°C in a volume .

## Advantages

Transmission oil TM-5 80W-90 has the following advantages:

- control of quality provides the high level of operating descriptions oil;
- excellent friction properties provide the smooth switching of transmissions and noiseless work;
- the modern antiscoring additives package provides the high level of defence at the different loadings, including shock;
- substantially reduces the wear of gearings and bearings;
- provides the high level of protecting from a wear in the wide range of loadings.

## Packaging types

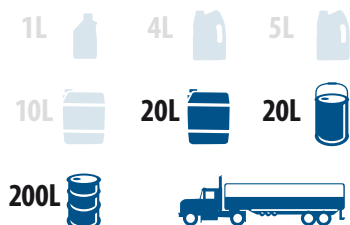

## Accordances

Oil TM-5 80W-90 corresponds classes:

API GL-5 и SAE 80W-90

## Typical descriptions

Kinematic viscosity at 100°C, mm <sup>2</sup> /s	14,8
Density at 20°C, kg/m <sup>3</sup>	895
Viscosity index	97
Flash point in open crucible, °C	230
Solidification temperature, °C	-25



Technical oils plant "JV YUKOIL".  
3A, Bazova str., Zaporozhzhya, 69084, Ukraine.  
Phone: +38 061 717 11 40.



Produced at TU U 23.2-31852954-013-2003

This is reference data and can be changed without notification.

This publication from 01.01.2010 replaces all early the published descriptions of this product.